



## Main Features

Each Ned Kelly Woodheater features an enclosed shroud which captures convected heat and projects it forward into the room. Other benefits of the distinctive Ned Kelly include:

- Safe and easy operation
- Clean burn technology
- Overnight burning
- Large loading front door
- Top plate cooking surface
- Easy finger tip control air setting
- Air wash glass cleaning system
- Rear heat shields
- Durable 6mm thick firebox with a 10 year warranty
- Removable baffle plate for heater and flue maintenance
- Standard 3 speed fan
- Made in Australia from locally sourced materials

Ned Kelly Wood Heaters have been tested to comply with:

- Australian Standards Compliance for Safety and Efficiency (AS 2918:2001, AS2918:1990)
- Australian Standards Compliance for Emmisions (AS/NZS 4012:1999, AS/NZS 4013:1999, AS/NZS 4014:1999)

All our models are finished with a heat resistant paint, brass plated handles and nameplate.

Standard colour range: Metallic Black, Charcoal. Other colours available upon request.



Railway Crescent | PO Box 51  
 Daylesford Vic 3460  
 t:03 5348 2586 | f: 03 5348 1200  
[www.woodheaters.com.au](http://www.woodheaters.com.au)  
[nedkelly@woodheaters.com.au](mailto:nedkelly@woodheaters.com.au)



**03 5348 2586**  
[www.woodheaters.com.au](http://www.woodheaters.com.au)

**03 5348 2586**  
[www.woodheaters.com.au](http://www.woodheaters.com.au)



# The Bushranger



# The Small Bushranger






# The Outlaw



The classic Ned Kelly. The Bushranger utilizes square folded shrouds surrounding the firebox to capture convected heat and project it into the room. A large glass door allows for easy firewood loading and ash removal.

Small in size but big on heat. The Small Bushranger has all of the Ned Kelly features in conveniently compact package. Perfect for smaller houses where space is limited.

The Round Ned Kelly. The Outlaw is comparable to the Large Bushranger in size and surpasses it in heat output. Features a unique rolled firebox with a deep ash bed for less frequent cleanup.

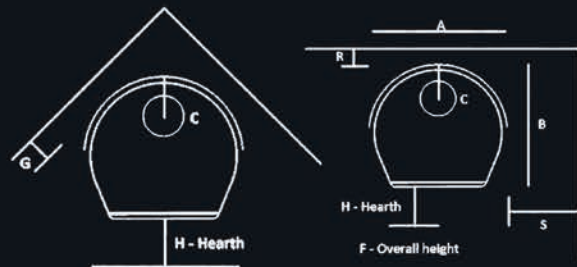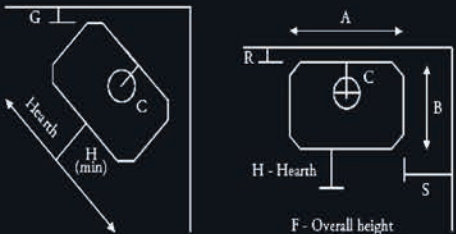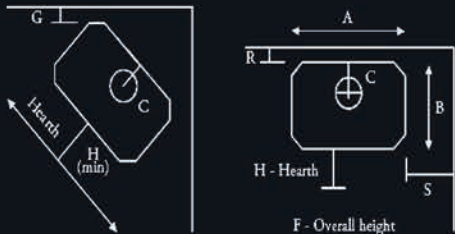

A - Width	630mm
B - Depth	600mm
C - Back to flue centre	150mm
G - Corner to wall	215mm
R - Rear to wall	150mm
S - Side to wall	585mm
F - Overall Height	920mm
H - Required hearth depth	400mm
Recommended hearth size	1100X1200mm
Emissions Factor	2.3g/kg
Maximum heat output	15.1kW
Heats up to	30squares

A - Width	550mm
B - Depth	500mm
C - Back to flue centre	150mm
G - Corner to wall	150mm
R - Rear to wall	150mm
S - Side to wall	475mm
F - Overall Height	820mm
H - Required hearth depth	300mm
Recommended hearth size	1100X1200mm
Emissions Factor	1.6g/kg
Maximum heat output	12.3kW
Heats up to	18squares

A - Width	648mm
B - Depth	581mm
C - Back to flue centre	160mm
G - Corner to wall	220mm
R - Rear to wall	150mm
S - Side to wall	440mm
F - Overall Height	925mm
H - Required hearth depth	370mm
Recommended hearth size	1100X1200mm
Emissions Factor	2.4g/kg
Maximum heat output	17.4kW
Heats up to	30squares